


DANOPANEL QUADRIL - PERFORATION DATA


PERFORATION DETAILS

Perforation type	Quadril - 12x12 mm square holes
Perforation percentage	13 %
Perforation pattern	Q1

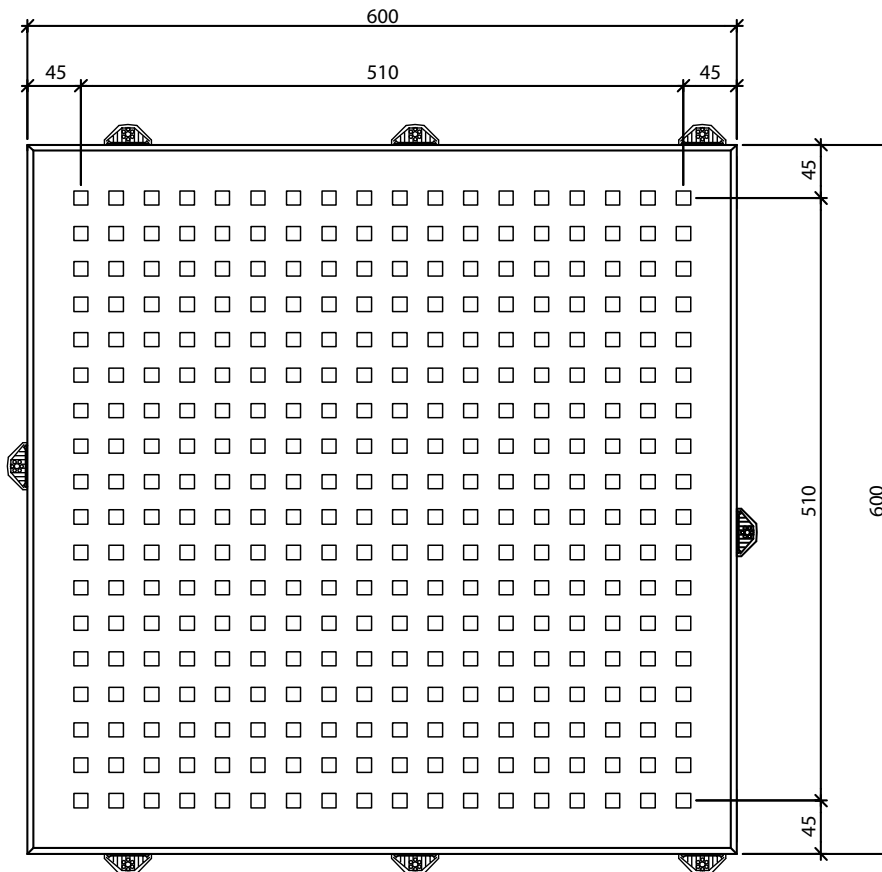

ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,55	0,80	0,85	0,70	0,70	0,60

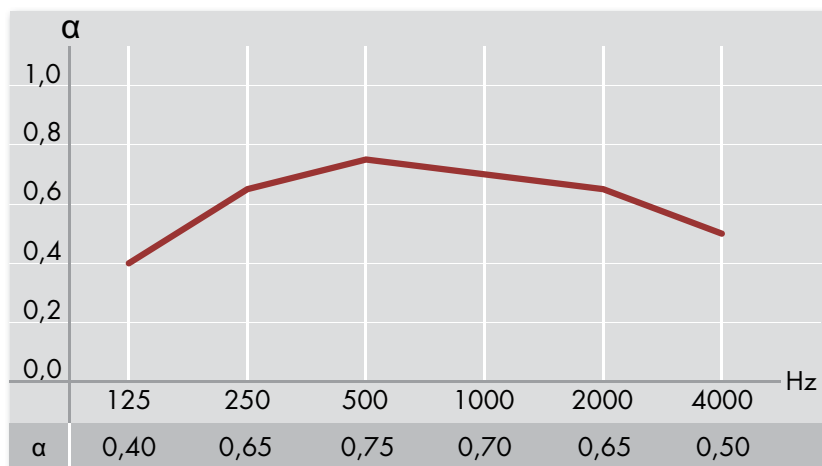


At 200 mm and with 50 mm mineral wool

DANOPANEL QUADRIL - PERFORATION DATA

This overview shows the special perforation patterns, that Danopanel Quadril is available with in 600 mm format. For more detailed drawings of a specific perforation pattern please contact our [local representative](#).


Q2F



Q2T




Q3F



Q3T



Q4F




Q4T



Q2L




Q4L2



Q3L



Q4T2



Q4L

