


DANOPANEL TANGENT - PERFORATION DATA


PERFORATION DETAILS

Perforation type	Tangent - 4x14 mm oval holes
Perforation percentage	21,3 %
Perforation pattern	T1

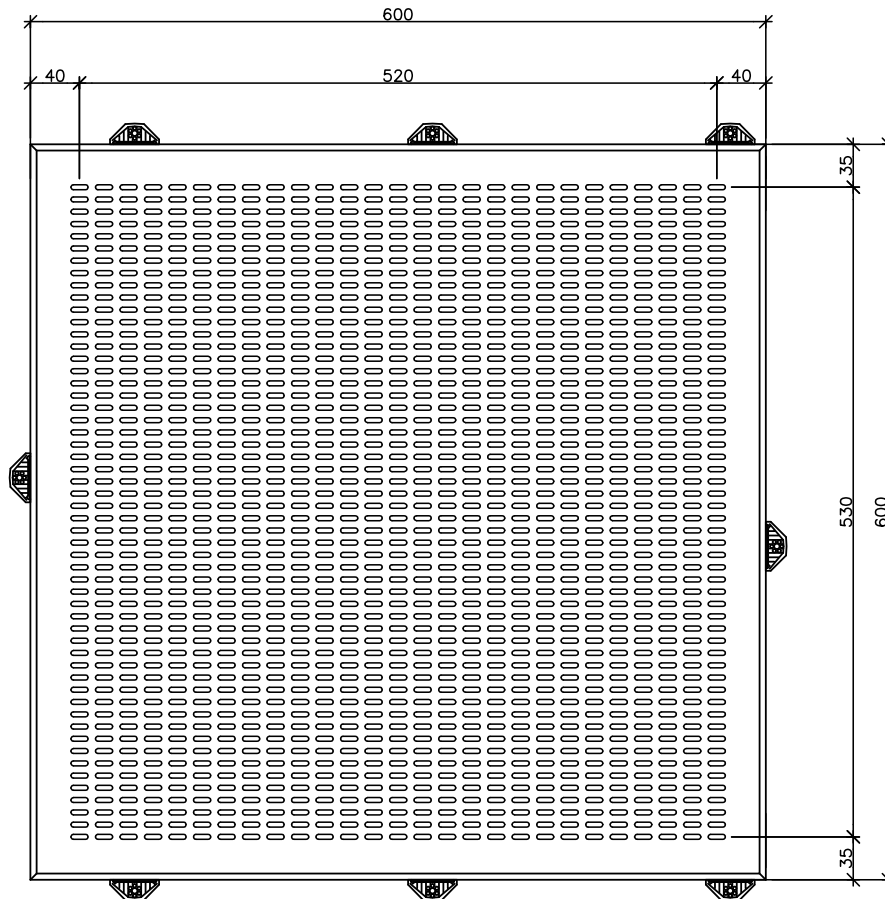

ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,75	0,90	0,90	0,85	0,90	0,95

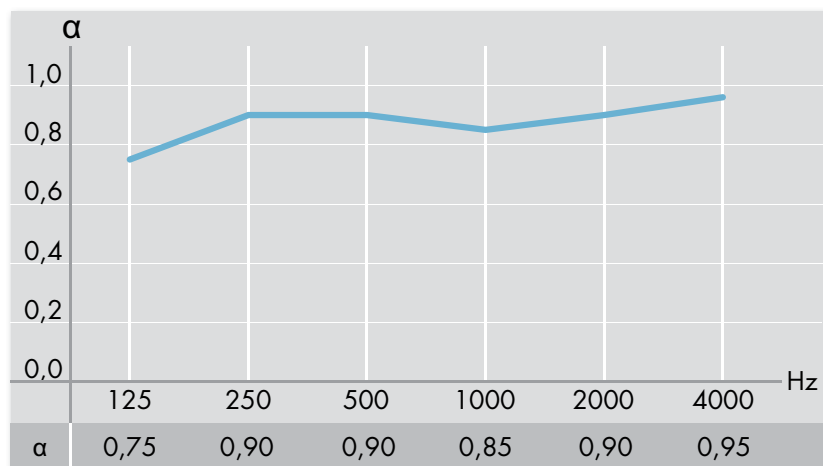

At 200 mm and with 50 mm mineral wool

DANOPANEL TANGENT - PERFORATION DATA

→ This overview shows the special perforation patterns, that Danopanel Tangent is available with in 600 mm format. For more detailed drawings of a specific perforation pattern please contact our [local representative](#).

T2L



T3L

